


PS001 - Packing Specification General Purpose Chip Resistors

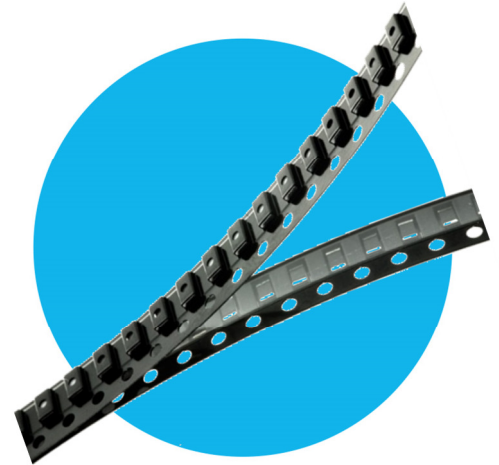

Applicable Series:
PCF, WCR

This packing specification covers all common chip sizes and only standard Pb-free versions.
See individual product datasheets for sizes available in each series.

Size	Qty & Tape	A	B	W	E	F	P ₀	P ₁	P ₂	ΦD ₀	t	ΦA	ΦB	ΦC	Wr	Tr
0201	10,000 ¹ Paper tape	0.4 ±0.05	0.7 ±0.05	8 ±0.2	1.75 ±0.1	3.5 ±0.05	4 ±0.1	4 ±0.1	2 ±0.05	1.55 ±0.05	0.42 ±0.1	178 ±2	60 ±1	13.5 ±1	9.5 ±1	11.5 ±1
0402		0.65 ±0.2	1.15 ±0.2								0.45 ±0.1					
0603	1.1 ±0.2	1.9 ±0.2	0.67 ±0.1													
0805	1.65 ±0.2	2.4 ±0.2	0.81 ±0.1													
1206	2 ±0.2	3.6 ±0.2	0.75 ±0.1													
1210	2.8 ±0.2	3.5 ±0.2	1.6 ±0.1								0.75 ±0.1					
2010	4000 Emboss plastic tape	2.9 ±0.2	5.6 ±0.2								1.5 ±0.1					
2512	3.5 ±0.2	6.7 ±0.2	5.5 ±0.05	1.5 ±0.1	1±0.2	13.5 ±1	15.5 ±1									

Note 1: 0201 size may also be supplied in quantities of 20,000 per reel – see individual product datasheet.
 Note 2: Peel force for cover tape on paper tape shall be between 8 and 40g at a peel speed of 300mm/min.
 Note 3: Peel force for cover tape on plastic tape shall be between 20 and 80g at a peel speed of 300mm/min.

Related product datasheets

PCF: <http://www.ttelectronicsresistors.com/datasheets/PCF.pdf>

WCR: <http://www.ttelectronicsresistors.com/datasheets/WCR.pdf>

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.