


TaNFilm® Small Outline Surface Mount Resistor Network

GUB Series

- Thin-film on ceramic technology
- 0.22" and 0.33" sizes available
- RoHS compliant version available
- DESC 87012 and 87013 available
- Standard JEDEC packages for automatic placement equipment

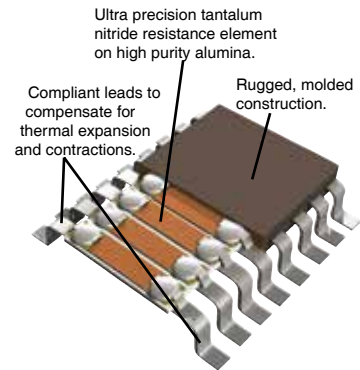

All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

IRC's TaNFilm®, Small Outline Integrated Circuit resistor networks are ideally suited for surface mounting. The 0.05 inch lead spacing provides higher lead density, increased component count, lower installed resistor cost, and better reliability. They are ideally suited for the latest surface mount assembly techniques, and each lead can be 100% visually inspected. The compliant leads relieve thermal expansion and contraction stresses created by soldering and temperature excursions.

The tantalum nitride film system provides precision tolerance, exceptional TCR tracking, and low noise. TaNFilm® provides stability, high reliability, and long life characteristics. Testing has demonstrated performance exceeding MIL-PRF-83401 characteristic H.

Electrical Data


Resistance Range (Ω)	GM Type	Schem A: 10 to 150K	Schem B: 10 to 75K
	GL Type	Schem A: 10 to 200K	Schem B: 10 to 100K
Absolute Tolerance	Available to $\pm 0.1\%$		
Ratio Tolerance To R1	Available to $\pm 0.05\%$		
TCR ($\text{ppm}/^\circ\text{C}$)	$\pm 25, \pm 50, \pm 100$		
TCR Tracking To R1 ($\text{ppm}/^\circ\text{C}$)	± 5		
Operating Temperature Range	-55°C to $+125^\circ\text{C}$		
Noise	Less than -25 dB		
Substrate	High purity alumina substrate		

Custom circuits and special testing available.

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Physical Data

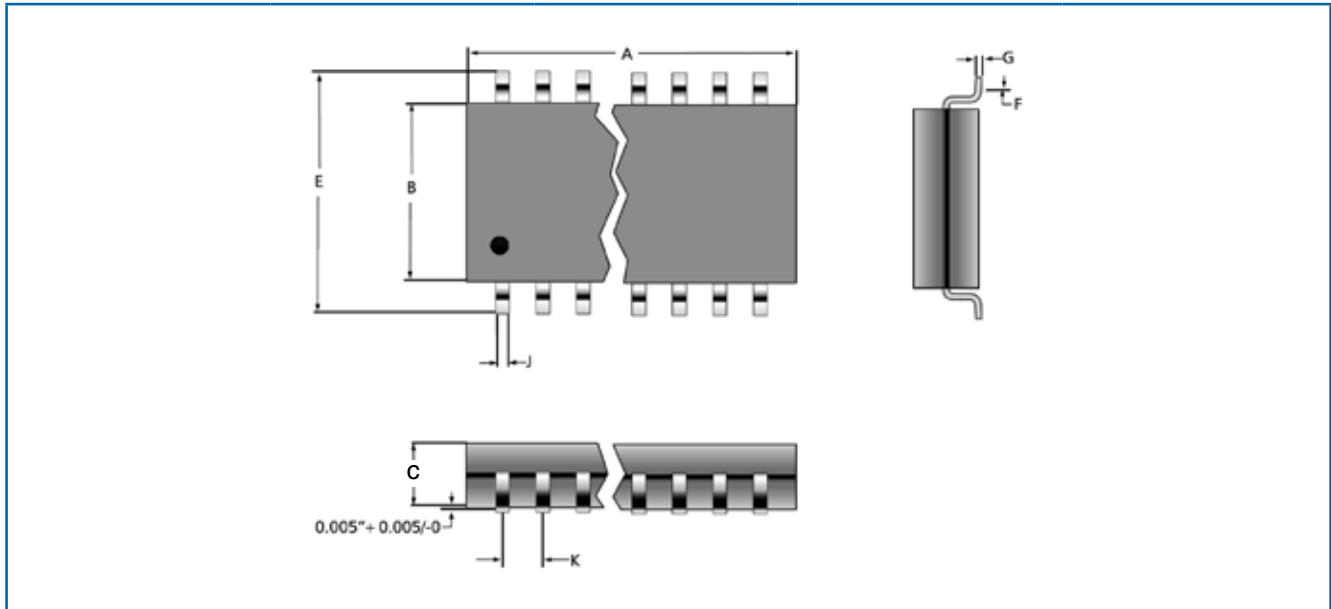

	GM7x	GM8x	GL8x	GL0x
A	0.390" ± 0.005	0.440" ± 0.005	0.440" ± 0.005	0.504" ± 0.008
B	0.220" ± 0.005	0.220" ± 0.005	0.297" ± 0.005	0.297" ± 0.005
C	0.090" max	0.090" max	0.105" max	0.105" max
E	0.300" ± 0.010	0.300" ± 0.010	0.407" ± 0.015	0.407" ± 0.015
F	0.028" ± 0.007	0.028" ± 0.007	0.028" ± 0.007	0.028" ± 0.007
G	0.010" ± 0.002	0.010" ± 0.002	0.010" ± 0.002	0.010" ± 0.002
J	0.017" ± 0.003	0.017" ± 0.003	0.017" ± 0.003	0.017" ± 0.003
K	0.050" ± 0.005	0.050" ± 0.005	0.050" ± 0.005	0.050" ± 0.005

Standard Circuits

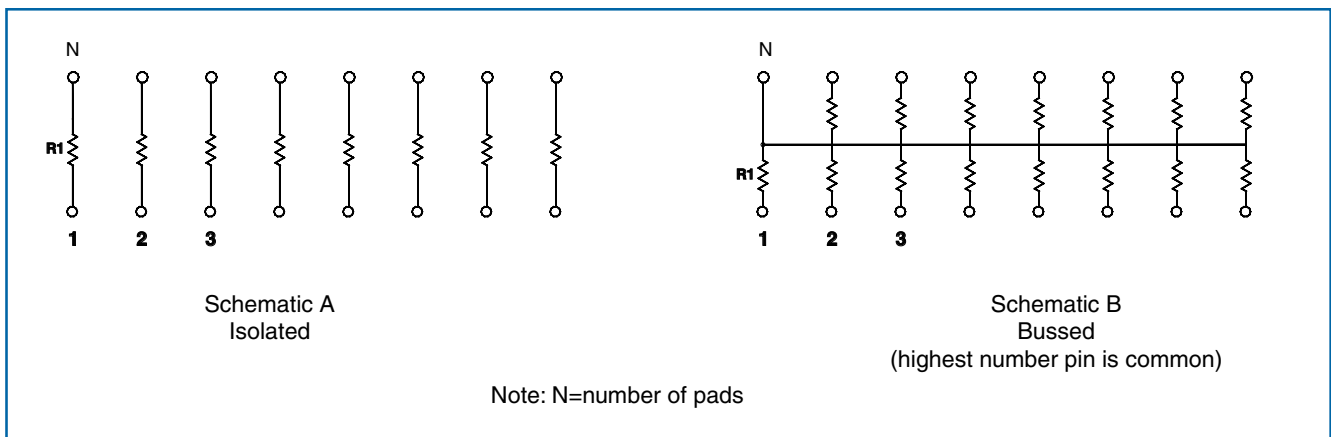


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Power Dissipation Data (watts @ 70°C)

	Schematic A		Schematic B	
	Per Resistor	Per Package	Per Resistor	Per Package
GM Series 14-pin	0.16W	1.0W	0.08W	1.0W
GM Series 16-pin	0.16W	1.2W	0.08W	1.2W
GL Series 16-pin	0.16W	1.2W	0.10W	1.2W
GI Series 20-pin	0.16W	1.5W	0.10W	1.5W

Power Derating Curve

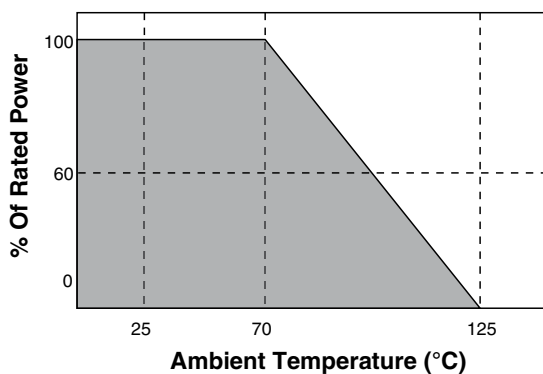

Ordering Data

Prefix	GUB - GM8A - 03 - 2001 - B - A
Model	
GM7A	- 14-pin 0.220" wide body, schematic A, 60/40 Sn/Pb leads
GM7ALF	- 14-pin, 0.220" wide body, schematic A, RoHS compliant leads
GM7B	- 14-pin 0.220" wide body, schematic B, 60/40 Sn/Pb leads
GM7BLF	- 14-pin, 0.220" wide body, schematic B, RoHS compliant leads
GM8A	- 16-pin 0.220" wide body, schematic A, 60/40 Sn/Pb leads
GM8ALF	- 16-pin, 0.220" wide body, schematic A, RoHS compliant leads
GM8B	- 16-pin 0.220" wide body, schematic B, 60/40 Sn/Pb leads
GM8BLF	- 16-pin, 0.220" wide body, schematic B, RoHS compliant leads
GL8A	- 16-pin 0.300" wide body, schematic A, 60/40 Sn/Pb leads
GL8ALF	- 16-pin, 0.300" wide body, schematic A, RoHS compliant leads
GL8B	- 16-pin 0.300" wide body, schematic B, 60/40 Sn/Pb leads
GL8BLF	- 16-pin, 0.300" wide body, schematic B, RoHS compliant leads
GL0A	- 20-pin 0.300" wide body, schematic A, 60/40 Sn/Pb leads
GL0ALF	- 20-pin, 0.300" wide body, schematic A, RoHS compliant leads
GL0B	- 20-pin 0.300" wide body, schematic B, 60/40 Sn/Pb leads
GL0BLF	- 20-pin, 0.300" wide body, schematic B, RoHS compliant leads
TCR Code (ppm/°C)	
01 = ±100; 02 = ±50; 03 = ±25	
Resistance code	
Standard MIL resistance code (e.g. 1002 = 10KΩ; 50R1=50.1Ω)	
Absolute tolerance	
J = ±5%; G = ±2%; F = ±1%; D = ±0.5%; C = ±0.25%; B = ± 0.10%	
Ratio tolerance to R1 (if specified)	
F = ±1%; D = ±0.5%; C = ±0.25%; B = ± 0.1%; A = ±0.05%	

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.